



COOK

ERC


MARK: _____

PROJECT: _____

DATE: _____



Energy Recovery Cassette Size 500-10000

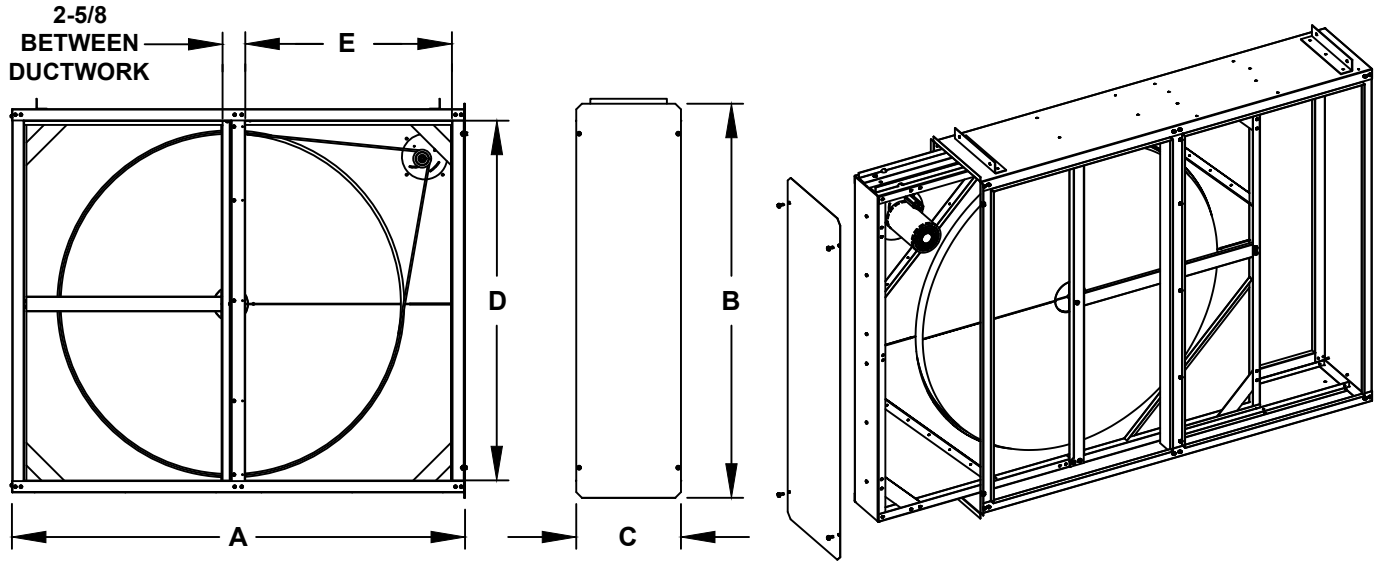

DIMENSION DATA

Size	A	B	C	Duct Connection		Ship Wt.
				D	E	
500	27-5/16	22-5/8	16-5/8	19-9/16	8-15/16	120
1000	32-5/16	28-5/8	16-5/8	25-9/16	11-7/16	163
1500	52-3/16	35-5/8	18-9/16	32-9/16	21-3/8	278
2500	54-11/16	45-5/8	18-9/16	42-9/16	22-5/8	379
3500	63-1/2	51-5/8	18-9/16	48-9/16	27	466
4500	69-11/16	57-5/8	18-9/16	54-9/16	30-1/8	553
5500	69-11/16	63-5/8	18-9/16	60-9/16	30-1/8	636
7000	82-11/16	69-5/8	21-1/8	66-9/16	36-5/8	781
8500	82-11/16	75-5/8	21-1/8	72-9/16	36-5/8	868
10000	87-1/4	81-5/8	27-7/8	78-9/16	38-7/8	1064

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

ACCESSORIES

1. Hinged Access Door
2. Quarter Turn Latch
3. Ceiling Mount Isolators

STANDARD CONSTRUCTION FEATURES:

Energy recovery wheel constructed of fluted synthetic media containing water selective molecular sieve desiccant - Cassette assembly slides out for easy access and consists of energy recovery wheel, drive motor, and drive components - Cabinet consist of a minimum of 18 gauge galvanized steel housing - 1" duct flanges for easy attachment to ductwork - Cabinet internally lined with 1" thick, 3 lb. density, FSK insulation - Removable door for easy access to cassette - Permanent wiring box - Plug to disconnect cassette from wiring box - Power Twist drive belt for easy belt replacement without disassembling cassette

QTY	MARK	CATALOG NUMBER	FAN INFORMATION		ACCESSORIES
			CFM	SP	

ER003R01