


DATE: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_



## Inline Blowers 200-700 Series

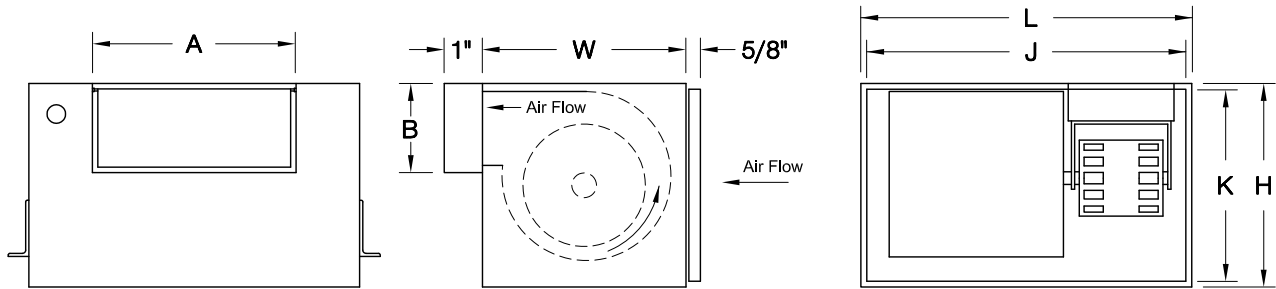

### DIMENSION DATA

Model No.	Housing			Outlet		Inlet		Ship Wt.
	L	W	H	A	B	J	K	
222,242	12-3/8	9-3/4	9-3/4	6	4-1/2	12-5/16	9-11/16	22
322,342	12-3/8	10-3/4	10-3/4	8	6	12-5/16	10-11/16	25
422	17	11-7/8	11-7/8	8	6	16-15/16	11-15/16	30
522,542	17	11-7/8	11-7/8	8	6	16-15/16	11-15/16	32
622,642	17	11-7/8	11-7/8	10-1/2	4-3/4	16-15/16	11-15/16	35
720,740	17	11-7/8	11-7/8	10-1/2	4-3/4	16-15/16	11-15/16	36

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

### ACCESSORIES

1. FAN SPEED CONTROL (FSC)
2. ROOF JACK
3. ROOF CAP
4. WALL CAP
5. EAVE ELBOW (322-740)
6. FILTER
7. BRICK VENT
8. CEILING RADIATION DAMPER
9. HANGING VIBRATION ISOLATOR
10. TIME DELAY SWITCH
11. 277 VOLT TRANSFORMER
12. 8" ROUND WALL CAP WITH DAMPER (222-522)
13. 6" AND 8" ROUND DUCT DAMPER (222-522)
14. ROOF CURB

### STANDARD CONSTRUCTION FEATURES:

Forward curved galvanized steel fan wheels - Corrosion resistant galvanized steel fan housing - Acoustically insulated housing - Aluminum backdraft damper with solid aluminum hinge rod mounted in brass bushings - Permanently lubricated motor with built-in thermal overload protection and disconnect plug - Interchangeable panels with removable fasteners allows the discharge to be easily changed - Internal wiring box with disconnect receptacle.

### CATALOG NUMBER DEFINITION:

GN - 222  
 └─ Series: 222,242,322...  
 └─ TYPE: GN = Inline (includes Inlet Collar)

QTY	MARK	CATALOG NUMBER (see above)	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES	
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE		

MOTOR TYPE: **PSC** (PERMANENT SPLIT CAPACITOR)

GM012R05