

DATE: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_



**Hooded Supply Ventilator  
 Extruded Aluminum Propeller  
 Roof Mounted/Belt Drive**

**DIMENSION DATA**

Size	A	B	C	L x W	T Sq.	Material Ga.		Max. Motor Frame	Roof Opening Sq.*	Ship Wt.
						Base	Hood			
24	28-3/4	3	10	59 x 59	36	14	18	182T	31-1/2	480
30	30-1/2	3	10	69 x 69	42	14	18	184T	37-1/2	560
36	33	3	10	80 x 80	48	14	18	215T	43-1/2	780
42	38	3	10	90 x 90	54	14	18	215T	48-1/2	1020
48	41-1/2	3	13-1/2	110 x 90	60	14	18	254T	55-1/2	1110
54	44-1/2	3	14-3/4	111 x 109	66	14	18	256T	61-1/2	1235
60	44-1/2	3	14-3/4	121 x 119	72	14	18	256T	67-1/2	1550
72	42	3	17-3/4	146 x 119	84	14	18	256T	79-1/2	1790


ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.  
 \* ROOF OPENING SIZE FOR CURBS SUPPLIED BY COOK ONLY.

**STANDARD CONSTRUCTION FEATURES:**

Extruded aluminum propeller - Spun steel Venturi/curb cap - Painted steel lower housing - Galvanized steel hood - Birdscreen - Heavy duty steel power assembly - Welded curb cap corners - Adjustable pitch drives through 5 hp motor - Regreasable bearings in a cast housing rated at 200,000 hours average life - Propellers are statically and dynamically balanced - Corrosion resistant fasteners - Oil and heat resistant, static conducting belts - All fans factory adjusted to specified RPM.

**NOTE:**

Sizes 42-72 require field assembly of hood.  
 Size 72 not currently AMCA certified.

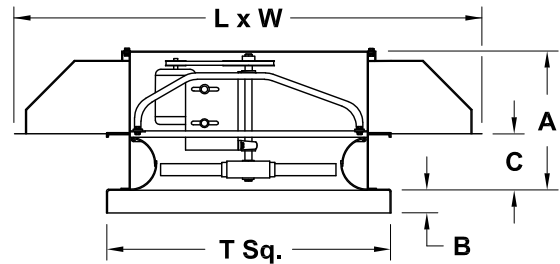

**ACCESSORIES**

1. DISCONNECT SWITCH
2. GRAVITY INTAKE DAMPER
3. MOTORIZED INTAKE DAMPER
4. RCG GALVANIZED CURB
5. RCA ALUMINUM CURB
6. ALUMINUM HOOD
7. EPOXY COATING

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES								
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE									

**LARGEST MOTOR SHIPPED MOUNTED: ODP (OPEN DRIP-PROOF) 5 HP; 2 SP (2 SPEED) 1-1/2 HP; X-PRF (EXPLOSION PROOF) 1-1/2 HP; TEFC (TOTALLY ENCLOSED FAN COOLED) 1-1/2 HP.**