

APD

DATE:	amca sokiosios	c(UL)us	Axia-Pac Wall Exhaust Fan
PROJECT:	PENTOSBESOT	C 103	Cast Aluminum Propelle
LOCATION:	an comme an comme ancessaria		Direct Drive

DIMENSION DATA

Size	A	В*	С	D*	Wall Opening	Wall Housing Gauge	Shipping Weight
12	19-1/2	17	14	17-3/4	17-1/4	18 GA.	88
16	23-1/2	21	18	22-1/8	21-1/4	18 GA.	110
20	27-1/2	25	22	27-1/4	25-1/4	18 GA.	156
24	33-1/2	31	27-1/2	27-1/4	31-1/4	18 GA.	220
30	39-1/2	37	33-1/2	24-1/2	37-1/4	18 GA.	273
36	45-1/2	43	39-1/2	28-1/2	43-1/4	18 GA.	393

ALL DIMENSIONS IN INCHES. SHIP WEIGHTS IN LBS.

STANDARD CONSTRUCTION FEATURES:


Cast aluminum propeller - Spun steel Venturi/wall base - Heavy duty steel power assembly - Welded wall base corners - Galvanized steel wall housing - Galvanized steel exhaust shutter - 1/2" mesh galvanized screen on inlet - Propellers are statically and dynamically balanced - Corrosion resistant fasteners.

ACCESSORIES

- 1. DISCONNECT SWITCH
- 2. MOTORIZED SHUTTER
- 3. EISEN-HEISS COATING
- EPOXY COATING
- 5. ALUMINUM EXHAUST SHUTTER
- 6. ALUMINUM CONSTRUCTION
- 7. SPECIAL



** Correct propeller rotation is CCW when viewed from inlet side.

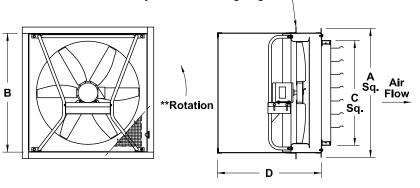

Adjustable Mounting Angle

NOTE: MOUNTING ANGLE IS 2 PIECES, SHIPPED LOOSE

			ON				
VOLTS	HZ	РН	TYPE	AC	ACCESSORIES		
	VOLIS	VOLTS HZ	VOLTS HZ PH	VOLTS HZ PH TYPE			

MOTOR TYPE: ODP (OPEN DRIP-PROOF); **TEFC** (TOTALLY ENCLOSED FAN COOLED).

2 SP (2 SPEED);

X-PRF (EXPLOSION PROOF);

^{*} B & D DIMENSIONS ARE TO THE OUTSIDE OF FASTENERS ON WALL HOUSING.