

MARK: _____

PROJECT: _____

DATE: _____

STANDARD CONSTRUCTION FEATURES:

Aluminum propeller blades attached to a steel hub - Plated steel motor mount/wire guard - Spun steel Venturi/wall base - Galvanized steel wall housing - Motorized supply shutter - 1/2" mesh galvanized screen on outlet - Single phase open-dripproof motor - Corrosion resistant fasteners - Welded wall base corners.

DIMENSION DATA

Size	A Sq.	B Sq.*	C Sq.	D*	Wall Opening	Wall Housing Gauge	Approx. Ship Wt.
12	19-1/2	17	14	17-3/4	17-1/4	18 Ga.	76
16	23-1/2	21	18	22-1/4	21-1/4	18 Ga.	95
20	27-1/2	25	22	27-1/4	25-1/4	18 Ga.	139
24	33-1/2	31	27-1/2	27-1/4	31-1/4	18 Ga.	151

ALL DIMENSIONS IN INCHES. SHIP WEIGHTS IN LBS.

* B-SQ & D DIMENSIONS ARE TO THE OUTSIDE OF FASTENERS ON WALL HOUSING



ACCESSORIES

1. DISCONNECT SWITCH
2. FAN SPEED CONTROL
3. EISEN-HEISS COATING
4. EPOXY COATING
5. SPECIAL

NOTE: MOUNTING ANGLE IS 2 PIECES, SHIPPED LOOSE



Packaged Supply Wall Fan Heavy Duty Aluminum Propeller Direct Drive

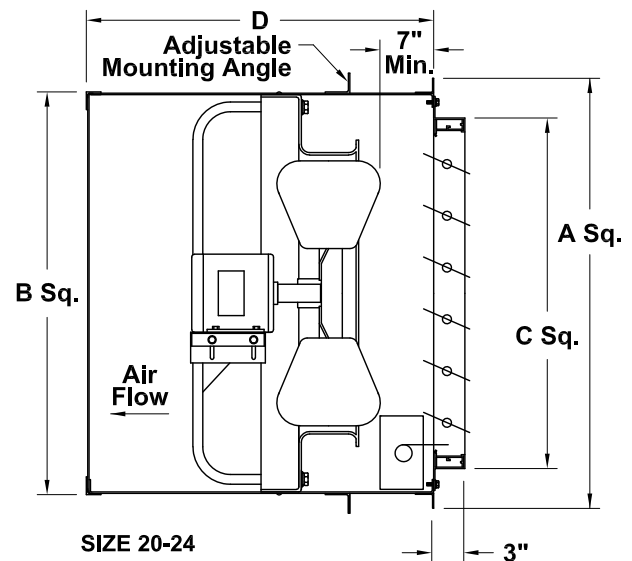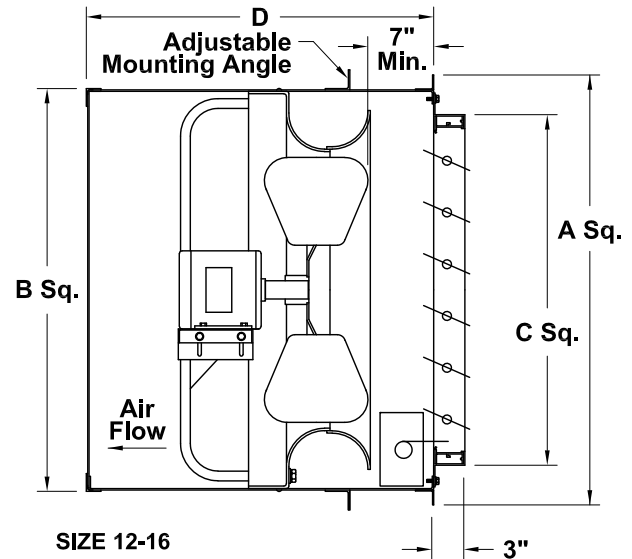

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES			
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE				

MOTOR TYPE: ODP (OPEN DRIP-PROOF).