



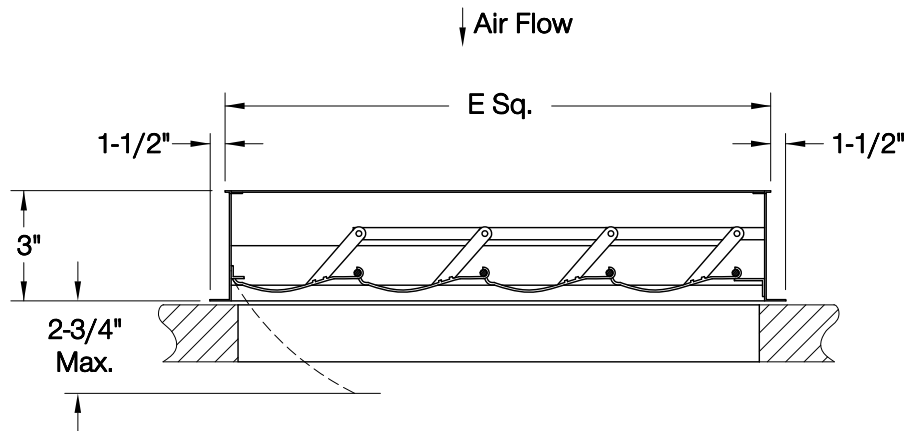
# COOK

# BDIC

DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

**Intake Center Pivot Backdraft Damper****ETS, H-Series****Supply Units****STANDARD CONSTRUCTION FEATURES:**

.062 aluminum blades – .050 aluminum frame –  
 .188 zinc pivots – Self-lubricating nylon bushings.

**OPTIONS:****DIMENSION DATA**

Qty	Mark	ETS H-Series	Cat. No.	E Sq.	Unit Wt.
		20	BDIC-26	22-3/4	22
		24	BDIC-30	26-3/4	24
		30	BDIC-36	32-3/4	32
		36	BDIC-42	38-3/4	49
		42	BDIC-48	44-3/4	58
		48	BDIC-54	50-3/4	70
		54	BDIC-60	56-3/4	79
		60	BDIC-66	62-3/4	88
		72	BDIC-78	74-3/4	124

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

**NOTES:**

Max operating temperature 200°F (95°C).

**X0205R05**