



COOK


Discharge Shutter

DATE: _____

PROJECT: _____

LOCATION: _____

Accessory Data Sheet
Galvanized Construction
CA DWDI

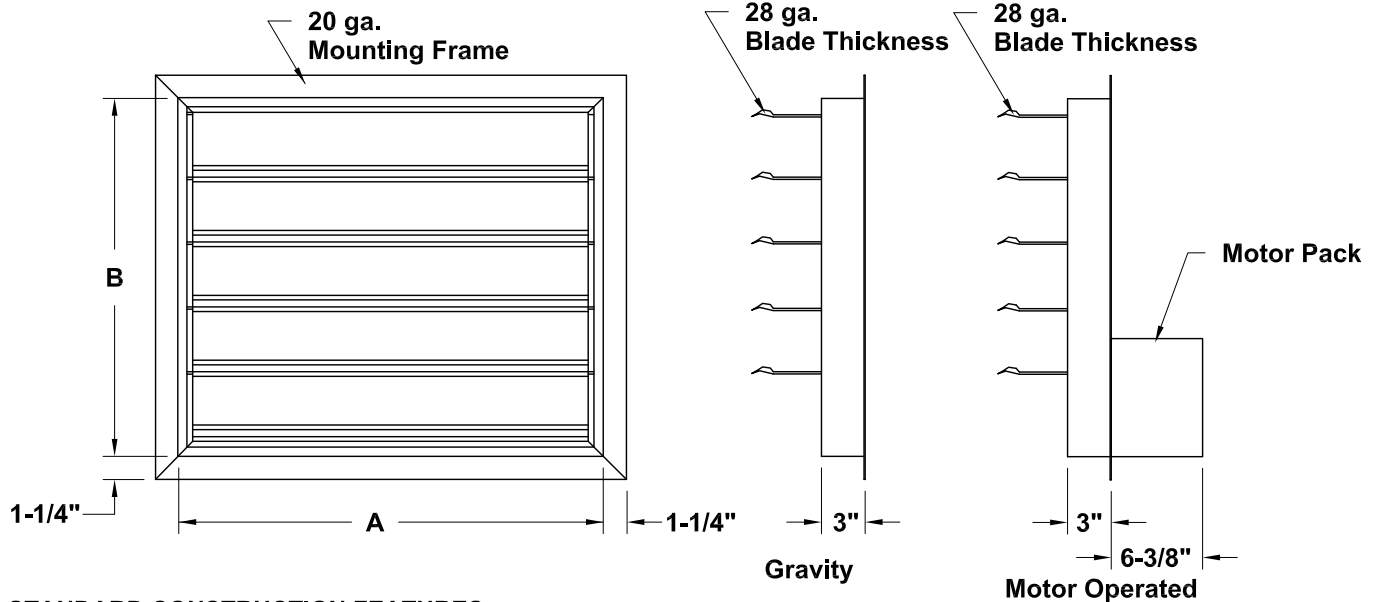

STANDARD CONSTRUCTION FEATURES:

Galvanized steel blades and frame - Stainless
steel pivots - Vinyl blade edge seals.

DIMENSION DATA

CA DWDI Size	Shutter Model Number		A	B	Shipping Wt.	
	Gravity	Motor Operated			Gravity	Motor Operated
120	ADSG-120D	MDSG-120D	17-11/16	12-1/8	3	8
135	ADSG-135D	MDSG-135D	19-15/16	13-5/8	4	9
150	ADSG-150D	MDSG-150D	22	15-1/4	5	10
165	ADSG-165D	MDSG-165D	24	16-15/16	6	11
180	ADSG-180D	MDSG-180D	26-1/16	18-1/2	7	12
195	ADSG-195D	MDSG-195D	28-7/16	19-1/2	8	13
210	ADSG-210D	MDSG-210D	30-3/8	21-5/8	10	15
225	ADSG-225D	MDSG-225D	32-1/2	23-3/16	11	16
245	ADSG-245D	MDSG-245D	35-1/16	25-1/2	13	23
270	ADSG-270D	MDSG-270D	39-7/16	27-1/2	16	26
300	ADSG-300D	MDSG-300D	43	31-3/16	19	29
330	ADSG-330D	MDSG-330D	47-1/16	34-1/2	23	33
365	ADSG-365D	MDSG-365D	52-3/16	38-11/16	28	38
402	ADSG-402D	MDSG-402D	57-13/16	41-3/4	33	43
445	ADSG-445D	MDSG-445D	64-1/4	45-15/16	41	51
490	ADSG-490D	MDSG-490D	70-1/8	51	49	64
540	ADSG-540D	MDSG-540D	77-15/16	55-3/4	59	74
600	ADSG-600D	MDSG-600D	86-1/4	62-3/16	73	88
660	ADSG-660D	MDSG-660D	94-7/8	68-7/16	88	103
730	ADSG-730D	MDSG-730D	104-3/4	75-13/16	106	126

ALL DIMENSIONS IN INCHES.

- NOTES: 1) MAXIMUM VELOCITY = 3500 FPM. MOTOR OPERATED DAMPERS REQUIRED FOR VELOCITIES BELOW 600 FPM.
 2) SIZE 120-330 REQUIRES 1 MOTOR.
 3) SIZE 365-490 REQUIRES 2 MOTORS.
 4) SIZE 540-730 REQUIRES 4 MOTORS.
 5) SIZE 402 AND LARGER EACH 460 VOLT MOTOR PACK IS SUPPLIED WITH A TRANSFORMER.

X0252R03