



COOK

Inlet Safety Guard

DATE: _____


PROJECT: _____

LOCATION: _____

Accessory Data Sheet
CA, CCP, CF, CFS, CIC
CPA, CPL, CPS, CPV
PLC, QMX, TMX, TCN, UCIC

STANDARD CONSTRUCTION FEATURES:

Spiral wound wire - Minimum 11 gauge
wire - Minimum 6 gauge eyes - Zinc
plated - Optional Lorenized coating.

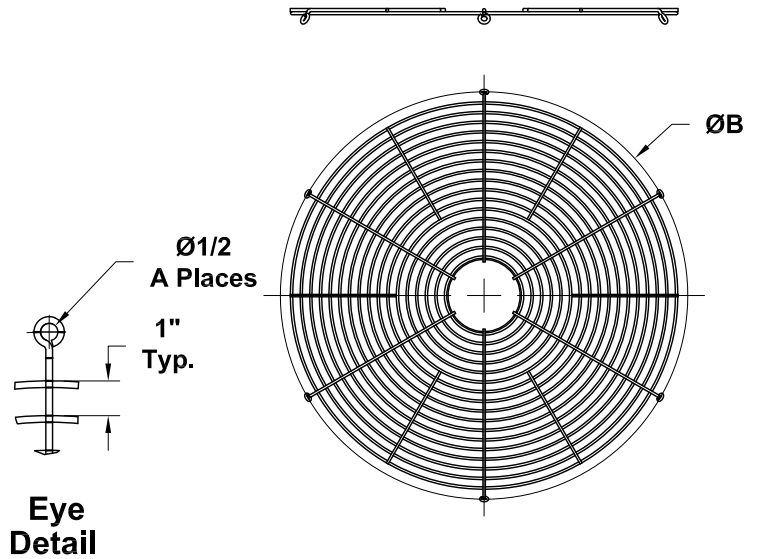


Arr. 1, 9, 10*

DIMENSION DATA

Blower Size	QMX/TMX Size	A	B	Approx. Ship Wt.
100	90	4	9	1
120	-	4	9	1
135	120	4	12	1
150	-	4	12	1
165	135	4	14 1/2	1
180	-	4	14 1/2	1
195	-	4	14 1/2	1
210	150	4	18 1/2	2
225	165	4	18 1/2	2
245	180	4	18 1/2	2
270	202	4	24 1/4	3
300	225	4	24 1/4	3
330	245	4	24 1/4	4
365	270	6	32 1/2	4
402	300	6	32 1/2	5
445	-	6	32 1/2	6
490	330	6	43	7
540	365	6	43	7
600	402	6	43	8

ALL DIMENSIONS IN INCHES. WEIGHT IN LBS.

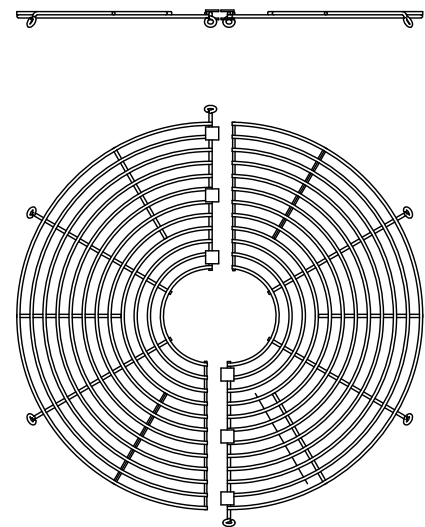

Arr. 3*

*NOTES:

Arrangements 1, 9, and 10 closed center,
Arrangement 3 open center and 2 piece construction.

X0569R02