



COOK

KSP-B

DATE: _____

PROJECT: _____

LOCATION: _____



Filtered Kitchen Supply
Packaged Ventilator
Side Discharge
Belt Drive


DIMENSION DATA

Model	A Sq.	B	C	D	E	F	T Sq.	H x W Discharge Opening	Material Gauges	
									Base	Housing
90KSPB	24-3/16	24	18 x 18-1/4	17-1/4	5-1/4	6-3/16	24-1/8	10-1/8 x 11-9/16	16	18
100KSPB	28-3/16	27	21 x 22-1/4	20-1/4	5-1/4	7-1/2	28-1/8	11-1/4 x 12-7/8	16	18
120KSPB	32-3/16	32-1/4	26-3/16 x 26-1/2	25-5/8	5-1/4	8-1/4	32-1/8	13-5/16 x 15-3/8	16	18
150KSPB	32-3/16	37-3/8	31-5/16 x 28-1/2	30-3/4	5-1/4	6-3/4	32-1/8	15-3/4 x 18-3/8	16	18
180KSPB	36-3/16	41-7/16	35-7/16 x 30-1/4	34-13/16	5-1/4	7-1/8	36-1/8	18-3/4 x 21-5/8	16	18
200KSPB	48-3/16	49-7/16	37-7/16 x 46	36-13/16	5-3/4	11-11/16	48-1/8	24-7/8 x 24-3/4	16	18

Model	Filters		Roof Opening Sq.*	Ship Wt.
	Qty	Size		
90KSPB	1	17-3/4 x 22-3/4	19-1/2	183
100KSPB	1	21-3/4 x 27	23-1/2	218
120KSPB	1	25-3/4 x 34-3/8	27-1/2	253
150KSPB	2	20-3/4 x 28	27-1/2	327
180KSPB	2	23-5/8 x 29-3/4	31-1/2	392
200KSPB	2	25 x 41-3/4	43-1/2	589

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.

Side Discharge
Opening

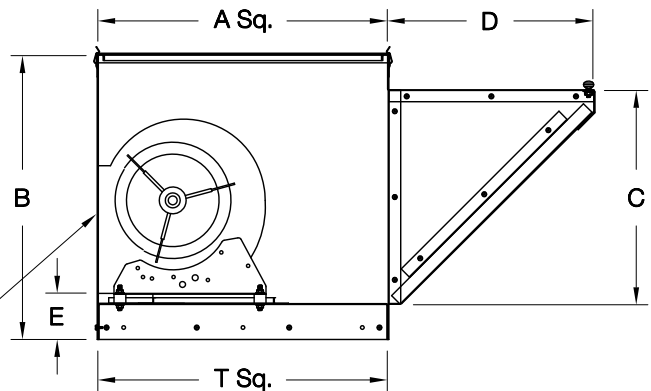


STANDARD CONSTRUCTION FEATURES:

Totally enclosed galvanized cabinet with hooded, filtered intake –
Insulated top cap with quick release latches – Permanent, one inch,
washable, aluminum filters (fiberglass or polyester media available) –
Adjustable pitch drives through 5 H.P. – Vibration isolators.

ACCESSORIES

1. INTAKE EXTENSION
2. COMMON CURB
3. COMMON CURB CAP
4. DUCT ADAPTER
5. RCG GALVANIZED CURB
6. INTAKE DAMPER



QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES			
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE				

LARGEST MOTOR SHIPPED MOUNTED: ODP (OPEN DRIP-PROOF) 1 HP (SIZES 90-180), 5 HP (SIZE 200);
2 SP (2 SPEED) NONE (SIZES 90-180), 1-1/2 HP (SIZE 200); X-PRF (EXPLOSION PROOF) NONE (SIZES 90-180),
1-1/2 HP (SIZE 200); TEFC (TOTALLY ENCLOSED FAN COOLED) NONE (SIZES 90-180), 1-1/2 HP (SIZE 200).

RE203R04